

# P11

## P11 | PATH LIGHT



### CATEGORY

LED Path Light

### LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)

20 Year Warranty

We run our fixtures **40%** cooler than LM-80 testing standards



BLK


AB

SSA

### SPECIFICATIONS

APPLICATION	CONSTRUCTION	DRIVER SYSTEM	INPUT POWER	INSTALLATION	LEAD WIRES	CRI	CERTIFICATION
Pathway Walkway Patios Large Areas	6061 Aluminum	External Driver	10.5-18 VAC	LV180 Ground Stake Not Included or the Optional Surface Plate	ULECC 18 AWG Tinned Copper Wire 46 Inch Length	80	UL1838 Low Voltage Landscape Lighting

### PRODUCT DIMENSIONS

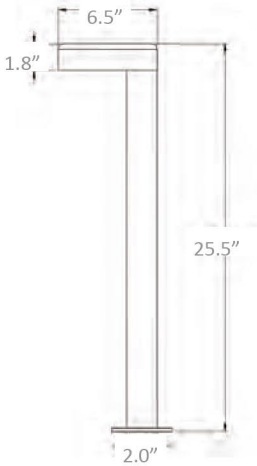

### WATTS / VA / LUMENS

#### WATTS / VA / LUMENS

- Low - 3W/6VA - 340lm
- Mid - 6W/10VA - 540lm
- High - 12W/15VA - 1700lm
- High - 15W/18VA - 2000lm
- High - 24W/28VA - 3000lm

### FINISH

BEAM SPREAD	FINISH
360°	Black (BLK) Architectural Bronze (AB) Stainless Steel Aluminum (SSA)

### POWER CONSUMPTION

COLOR TEMPERATURE		VA
3000K (LOW)	Mid - High	6
2700K	Low - Mid - High	5
5000K	Low - Mid - High	5
AMB*	Low - Mid	6
BLU	Low - Mid	5
RBL	Low - Mid	5
GRN	Low - Mid	5
RED*	Low - Mid	4

### PHOTOMETRICS

\*Complete IES files furnished upon request.

### ADDITIONAL INFO

- For custom light output, contact your sales associate
- \*Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information
- Optional Accessories: 36" Post, Mounting Bracket (additional cost)

### FEATURES

- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Machined Metal Ingot, not Cast Material
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver



OLUTRON



BUILT IN THE USA

