

VISIONARY SERIES

V2 | SPOT LIGHT



A FIXTURE FOR LIFE



CATEGORY

LED Spot Light

LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)
 20 Year Warranty
 We run our fixtures **40%** cooler than LM-80 testing standards



BLK


BR

SSA

SPECIFICATIONS

APPLICATION	CONSTRUCTION	DRIVER SYSTEM	INPUT POWER	INSTALLATION	LEAD WIRES	CRI	CERTIFICATION
Up Light Shadowing Wall Wash Silhouette Architectural Accents	6061 Aluminum C360 Solid Brass	External Driver	10.5-18 VAC	LV180 Ground Stake Included	ULECC 18 AWG Tinned Copper Wire 46 Inch Length	80	UL1838 Low Voltage Landscape Lighting

PRODUCT DIMENSIONS

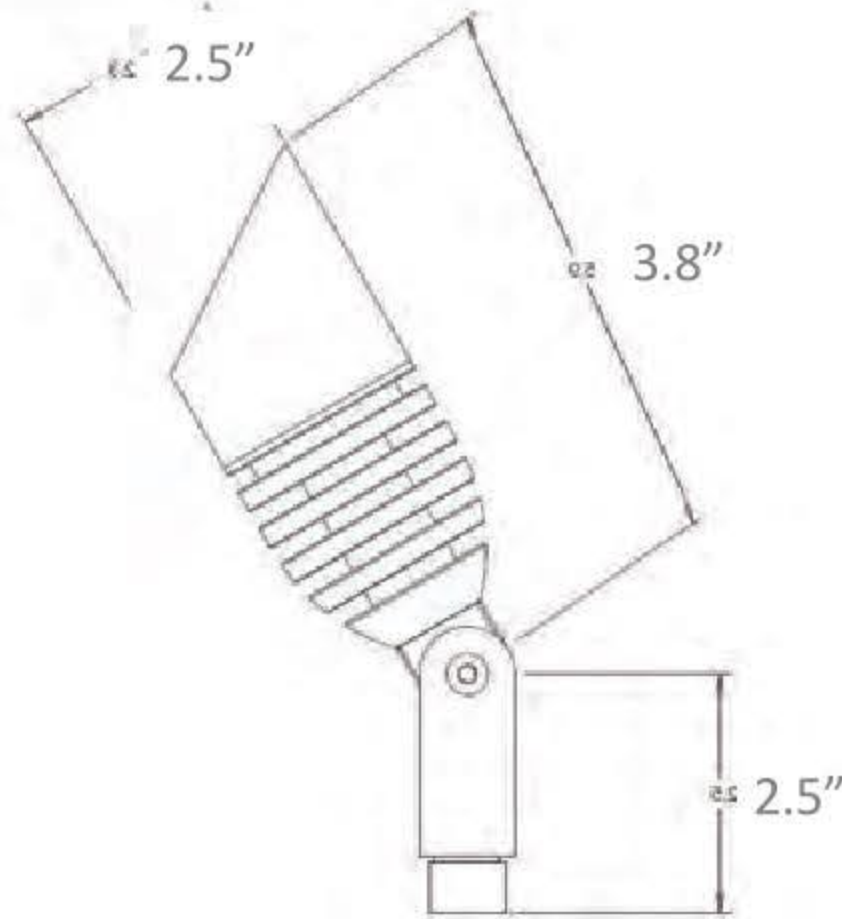

PHOTOMETRICS

*Complete IES files furnished upon request.

EQ / WATTS / VA / LUMENS

EQ / W / VA / LM

10 - 2W/4VA - 130lm

20 - 4W/7VA - 210lm

35 - 6W/10VA - 280lm

FEATURES

- Compression lens technology; no glue
- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Machined Metal Ingot, not Cast Material
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver
- Lumen levels- fixtures tested with shrouds

ADDITIONAL INFO

- Built in USA
- For custom light output, contact your sales associate
- **Fuchsia and Lavender require additional lead time
- *Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information

BEAM SPREAD & FINISH

BEAM SPREAD	FINISH
12° 25° 40° 60°	Black (BLK) C360 Solid Brass (BR) Stainless Aluminum (SSA)

POWER CONSUMPTION

COLOR TEMPERATURE	VA	VA	VA
3000K	4	7	10
2700K	4	7	10
5000K	4	7	10
AMB*	6	10	11
BLU	6	11	11
RBL	6	10	11
GRN	6	11	11
RED*	4	8	8
FSA**	N/A	N/A	9
LVR**	N/A	N/A	10

INDICATES STOCKED ITEMS