

VISIONARY SERIES

V3 DOWN | SPOT LIGHT



CATEGORY

LED Spot Light | Down


LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)
20 Year Warranty
We run our fixtures **40%** cooler than LM-80 testing standards

SPECIFICATIONS

APPLICATION	CONSTRUCTION	DRIVER SYSTEM	INPUT POWER	INSTALLATION	LEAD WIRES	CRI	CERTIFICATION
Down Light ONLY	6061 Aluminum	Internal Driver	10.5-18 VAC		ULECC 18 AWG Tinned Copper Wire 39 Inch Length	80	UL1838 Low Voltage Landscape Lighting

PRODUCT DIMENSIONS

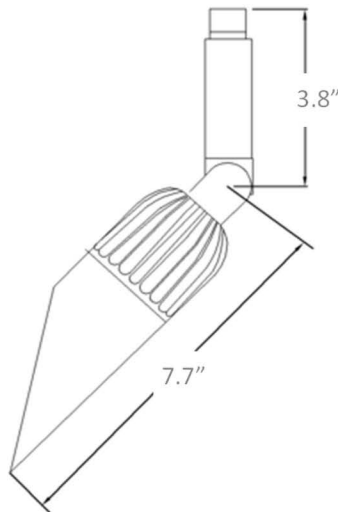

BE - WATTS / VA / LUMENS

BE - WATTS / VA / LUMENS
20 - 2W/4VA - 190lm
35 - 4W/7VA - 330lm
50 - 6W/10VA - 460lm
75 - 9W/15VA - 620lm

BEAM SPREAD & FINISH

BEAM SPREAD	FINISH
12° 25° 40° 60°	Architectural Bronze (AB)

PHOTOMETRICS

*Complete IES files furnished upon request

FEATURES

- Compression lens technology; no glue
- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Machined Metal Ingot, not Cast Material
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver
- Lumen levels- fixtures tested with shrouds

POWER CONSUMPTION

COLOR TEMPERATURE	VA	VA	VA	VA
3000K	4	7	11	15
2700K	4	7	11	15
5000K	4	7	11	15
AMB*	6	10	11	17
BLU	5	11	11	17
RBL	6	7	11	17
GRN	6	11	11	17
RED*	4	8	8	13
FSA**	N/A	N/A	9	15
LVR**	N/A	N/A	11	16

■ INDICATES STOCKED ITEMS

ADDITIONAL INFO

- Built in USA | Tampa, FL
- For custom light output, contact your sales associate
- **Fuchsia and Lavender require additional lead time
- *Color Temperature Amber and Red are not Turtle Friendly, see our Turtle Friendly fixtures for more information

