

MICRO MAX II

MM | MICRO SERIES

 A FIXTURE FOR LIFE

CATEGORY


Specialty LED Light

LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)

20 Year Warranty


We run our fixtures **40%** cooler than LM-80 testing standards

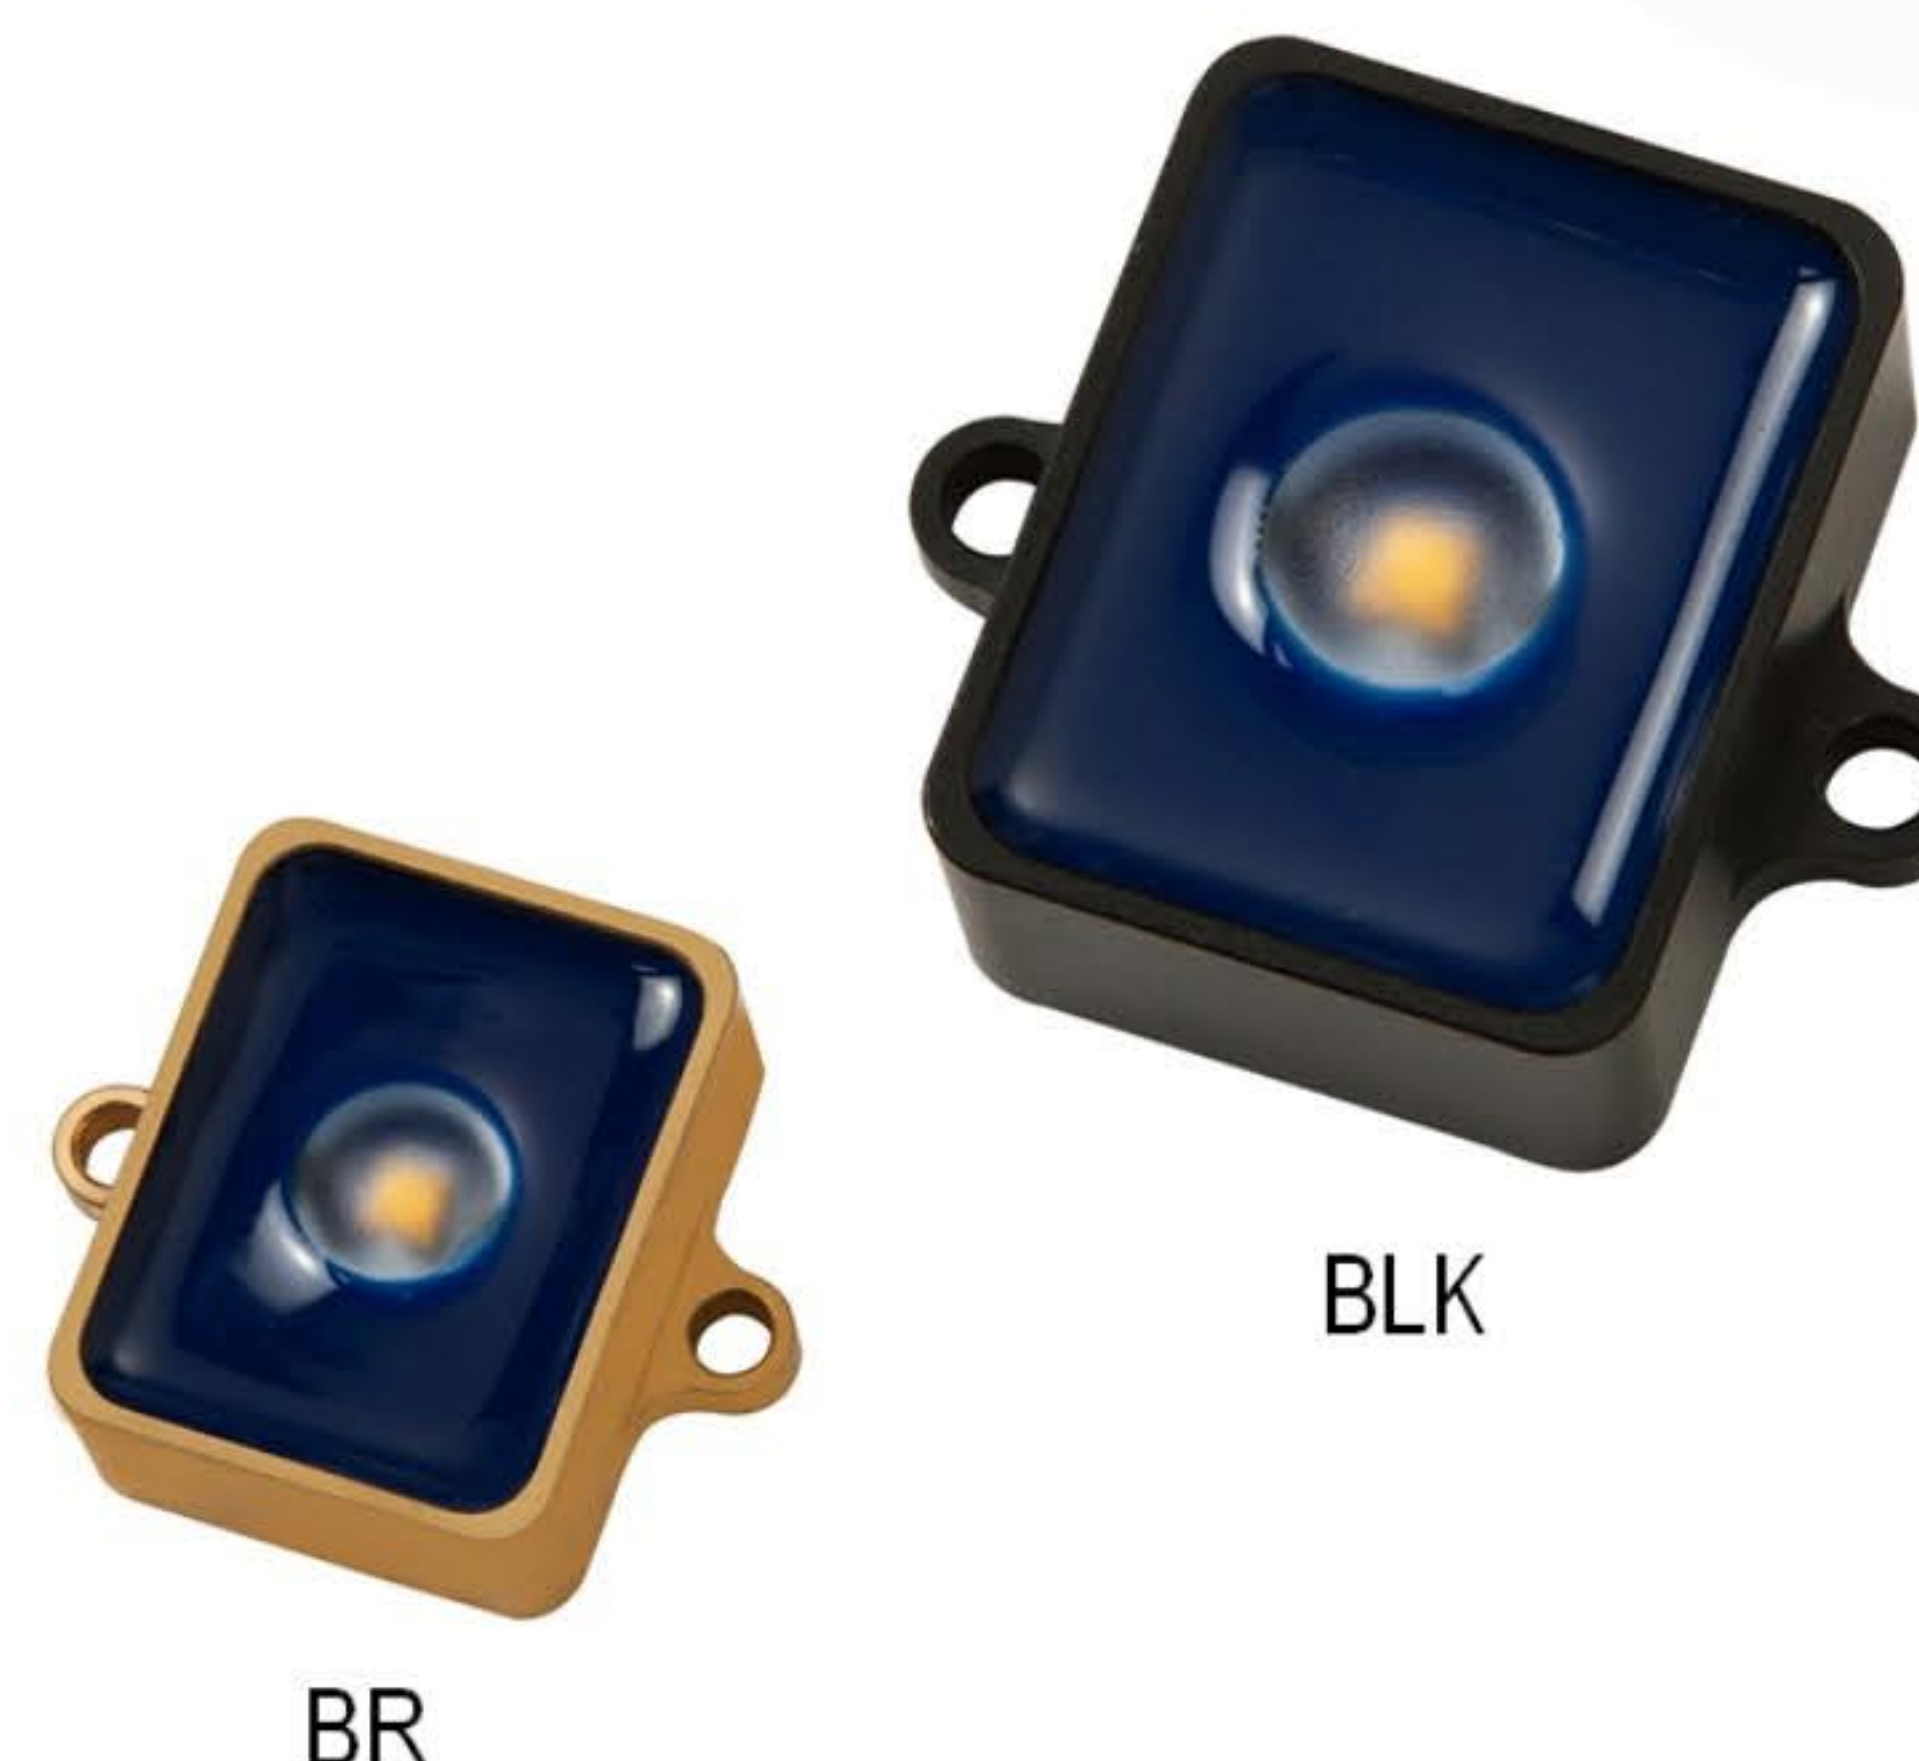

SPECIFICATIONS

APPLICATION	CONSTRUCTION	DRIVER SYSTEM	INPUT POWER	INSTALLATION	LEAD WIRES	CRI	CERTIFICATION
Up/Down Light Shadowing Wall Wash Silhouette Architectural Accents	6061 Aluminum C360 Solid Brass	Internal Driver	10.5-18 VAC	See features section for installation details	UL1429 22 AWG Tinned Copper Wire 60 Inch Length	80	UL1838 Low Voltage Landscape Lighting IP68

PRODUCT DIMENSIONS

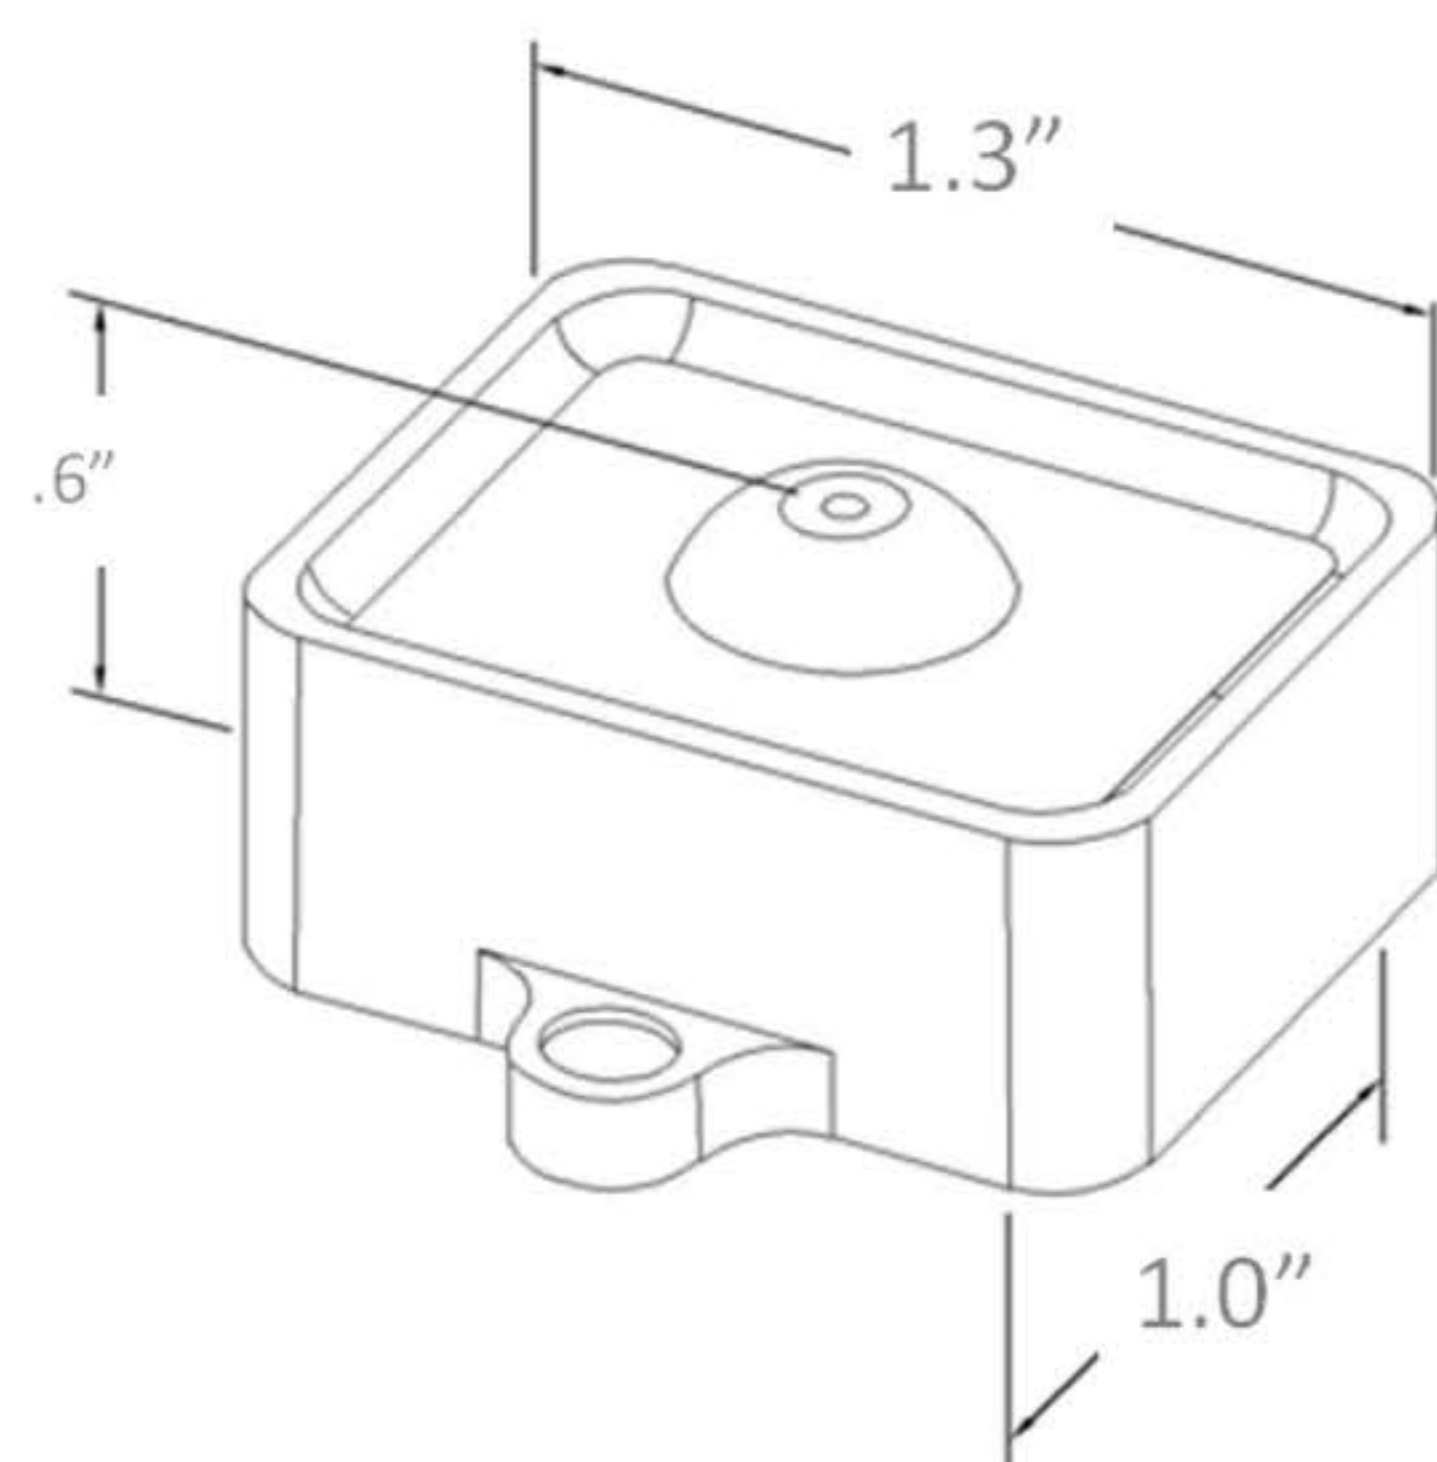

PHOTOMETRICS

*Complete IES files furnished upon request.

WATTS / VA / LUMENS

WATTS / VA / LUMENS
1W/2VA - 115lm









FEATURES

- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Machined Metal Ingot, not Cast Material
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver
- **BLACK MODEL ONLY** is suitable for installation in: fresh water, fish ponds, fish tanks
- **BRASS MODEL ONLY** is suitable for installation in: fresh water, NOT suitable for fish ponds or fish tanks
- No chlorine/harsh chemicals

BEAM SPREAD & FINISH

BEAM SPREAD	FINISH
130°	Black (BLK) C360 Solid Brass (BR)

POWER CONSUMPTION

COLOR	TEMPERATURE	VA
	3000K	2
	2700K	2
	5000K	2
	AMB *	1
	BLU	2
	RBL	2
	GRN	2
	RED*	1

INDICATES STOCKED ITEMS

ADDITIONAL INFO

- Built in USA
- For custom light output, contact your sales associate
- *Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information
- Full Shield accessory at additional cost

