

X-LIGHT SINGLE SIDE

X-LIGHT ONE | PATH LIGHT

CATEGORY

LED Path Light

LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)

20 Year Warranty

We run our fixtures **40%** cooler than LM-80 testing standards




BR

SS

SPECIFICATIONS

APPLICATION	CONSTRUCTION	DRIVER SYSTEM	INPUT POWER	INSTALLATION	LEAD WIRES	CRI	CERTIFICATION
Pathway Wall Sconces Patios Docks Driveways	H59 Cast Brass 316 Stainless Steel	Internal Driver	10.5-18 VAC	Surface plate included	SJEOOW 18 AWG Tinned Copper Wire 60 Inch Length	80	UL1838 Low Voltage Landscape Lighting

PRODUCT DIMENSIONS

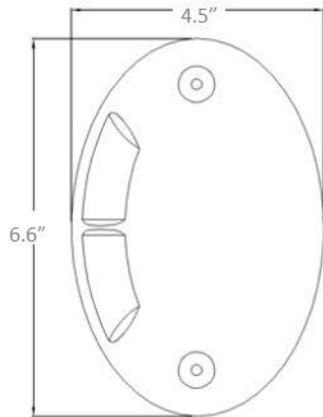

WATTS / VA

WATTS / VA / LUMENS

2W/3VA

BEAM SPREAD & FINISH

BEAM SPREAD	FINISH
Diffused Non-Diffused	H59 Cast Brass (BR) Stainless Steel (SS)

POWER CONSUMPTION

COLOR	TEMPERATURE	VA
Yellow	3000K	4
Yellow	2700K	4
Yellow	5000K	4
Amber	AMB*	3
Blue	BLU	4
Blue	RBL	4
Green	GRN	4
Red	RED*	3

INDICATES STOCKED ITEMS

PHOTOMETRICS

*Complete IES files furnished upon request.

FEATURES

- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver

ADDITIONAL INFO

- Built in USA | Tampa, FL
- For custom light output, contact your sales associate
- *Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information



LUTRON



BUILT IN THE USA

20 YEAR WARRANTY

Powered by CREE LEDs