

# PL013 LED BRASS TIKI VILLA

## PL013 | PATH LIGHT



SOLID BRASS

### CATEGORY

LED Path Light

### LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)


20 Year Warranty

We run our fixtures **40%** cooler than LM-80 testing standards

### SPECIFICATIONS

APPLICATION	CONSTRUCTION	DRIVER SYSTEM	INPUT POWER	INSTALLATION	LEAD WRES	CRI	CERTIFICATION
Pathways Walkways Patios Small Areas	Solid Brass	External Driver	10.5-18 VAC	Ground Stake Included  Optional height: 6", 12", and 23.7"	ULECC 18 AWG Tinned Copper Wire 27 Inch Length	80	UL1838 Low Voltage Landscape Lighting

### PRODUCT DIMENSIONS

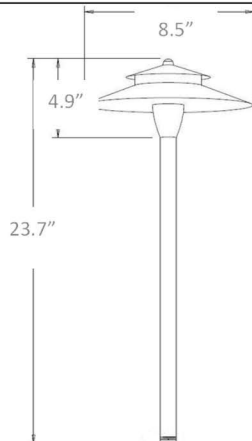

### WATTS / VA / LUMENS

WATTS / VA / LUMENS

2W/5VA - 160lm

### BEAM SPREAD & FINISH

BEAM SPREAD	FINISH
Flood	Solid Brass

### POWER CONSUMPTION

COLOR	TEMPERATURE	VA
	3000K	5
	2700K	5
	5000K	5
	AMB*	6
	BLU	5
	RBL	5
	GRN	5
	RED*	4

INDICATES STOCKED ITEMS

### PHOTOMETRICS

\*Complete IES files furnished upon request

### FEATURES

- Solid Brass fixtures will patina over time they are exposed to outdoor elements
- Compression lens technology; no glue
- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver

### ADDITIONAL INFO

- Built in USA | Tampa, FL
- For custom light output, contact your sales associate
- \*Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information

